


## Micro-Dot™ Manual Syringe Dispenser

- Simple, manual operation that requires no electric or air
- Positive-displacement dispensing with adjustable stroke
- Control over dispense volume, assuring an accurate dispense despite viscosity and syringe level changes
- Dispenses a wide range of low-to-high viscosity materials
- Portable; can be used anytime, anywhere
- Utilizes disposable syringe as fluid reservoir for easy product changeover
- Dispensers design eliminates the risk of material contamination during dispense
- Compatible with EFD Ultra<sup>®</sup> and Optimum™ syringes, Fishman<sup>®</sup> syringes, and other 3, 5, and 10 mL machine-ready syringes
- Available with thumb or lever actuation

The Micro-Dot™ portable syringe dispenser offers positive-displacement accuracy for dispense volumes as small as 0.0003 mL. Once a volume is set it can be repeated with accuracy. This syringe dispenser utilizes a pre-packaged disposable syringe as its fluid reservoir, preventing any contact between the fluids and the dispenser eliminating fluid contamination during dispense. With the proper dispense tip selection, the Micro-Dot is suitable for dispensing a wide range of low-to-high viscosity fluids including pastes, lubricants, adhesives, sealants, and more.

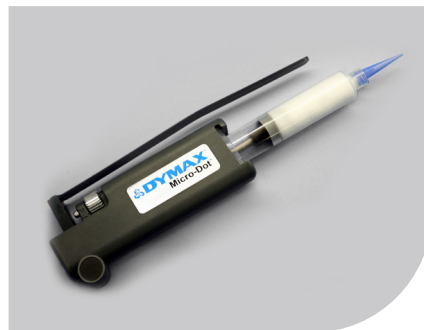


Lever Activated Micro-Dot Syringe Dispenser  
(T20010)



Thumb Activated Micro-Dot Syringe Dispenser  
(T20000)

## Specifications

<b>Part Number</b>	T20000 Thumb Activated T20010 Lever Activated
<b>Dispenser Type</b>	Manual, positive displacement syringe dispenser
<b>Activation</b>	Manual by lever or thumb actuator
<b>Shot Size</b>	Minimum: 0.0003 mL (400 cP material with 25 gauge taper tip) Maximum: 0.170 mL (400 cP material with 14 gauge taper tip)
<b>Dimensions (L x W x H)</b>	4.5" x 0.87" x 2.13" (11.4 cm x 2.2 cm x 5.4 cm)
<b>Weight</b>	2.8 oz. (81.3 g)
<b>Unit Warranty</b>	1 year from purchase
<b>Recommended Accessories</b>	T15466 Inclined Syringe Stand

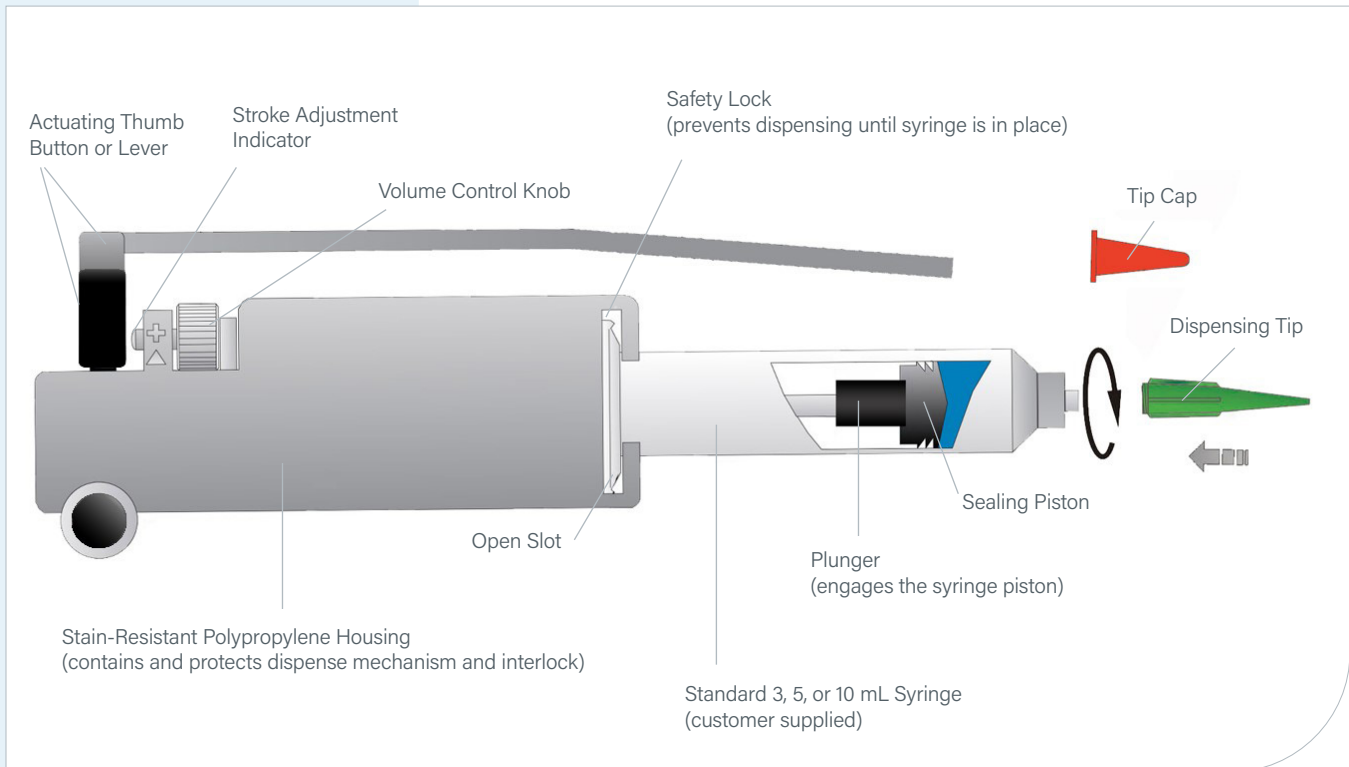

[www.dymax.com](http://www.dymax.com)

### Americas

USA | +1.860.482.1010 | [info@dymax.com](mailto:info@dymax.com)

### Europe

Germany | +49 611.962.7900 | [info\\_de@dymax.com](mailto:info_de@dymax.com)  
Ireland | +353 21.237.3016 | [info\\_ie@dymax.com](mailto:info_ie@dymax.com)

### Asia

Singapore | +65.67522887 | [info\\_ap@dymax.com](mailto:info_ap@dymax.com)  
Shanghai | +86.21.37285759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Shenzhen | +86.755.83485759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Hong Kong | +852.2460.7038 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Korea | +82.31.608.3434 | [info\\_kr@dymax.com](mailto:info_kr@dymax.com)

©2011 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

Please note that most dispensing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax standard Conditions of Sale published on our website. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation. Data sheets are available for valve controllers or pressure pots upon request.

PB025 8/22/2011