



## Multi-Cure<sup>®</sup> 9-20557-LV Flexible, Light-Cure Conformal Coating

### APPLICATIONS

- Conformal Coating

### FEATURES

- UV/Visible Light Cure
- Secondary Heat Cure
- Solvent Free
- One Part, No Mixing or Dilution Required
- Flexible for Enhanced Thermal Shock Performance

### OTHER FEATURES

- MIL-I-46058C Listed
- IPC-CC-830-B Approved
- Blue Fluorescing
- Halogen-Free

Dymax Multi-Cure<sup>®</sup> 9-20557-LV cures upon exposure to light and is designed for rapid conformal coating of printed circuit boards and other electronic assemblies. The low elastic modulus of 9-20557-LV allows it to excel in coating applications where thermal shock performance is critical. Dymax 9-20557-LV is a Multi-Cure<sup>®</sup> material specially formulated to cure with heat in applications where shadow areas exist. Dymax Multi-Cure<sup>®</sup> materials contain no nonreactive solvents and cure upon exposure to light. Their ability to cure in seconds enables faster processing, greater output, and lower processing costs. When cured with Dymax light-curing spot lamps, focused-beam lamps, or flood lamps, they deliver optimum speed and performance for conformal coating. Dymax lamps offer the ideal balance of UV and visible light for the fastest, deepest cures. This product is in full compliance with RoHS directives 2015/863/EU.

UNCURED PROPERTIES *		
Property	Value	Test Method
Solvent Content	No Nonreactive Solvents	N/A
Chemical Class	Acrylated Urethane	N/A
Appearance	Colorless Transparent Liquid	N/A
Soluble in	Organic Solvents	N/A
Density, g/ml	1.02	ASTM D1875
Viscosity, cP (20 rpm)	850	ASTM D1084
Shelf Life at Recommended Conditions from Date of Manufacture	18 months	N/A

ADHESION	
Substrate	Recommendation
Lead Frame	✓
Ceramic	✓
PCB	✓
Flex	✓
Silicon	✓

✓ Recommended      ○ Limited Applications  
 st Requires Surface Treatment (e.g. plasma, corona treatment, etc.)

CURED MECHANICAL PROPERTIES *		
Property	Value	Test Method
Durometer Hardness	D70	ASTM D2240
Tensile at Break, MPa [psi]	21.7 [3,150]	ASTM D638
Elongation at Break, %	100	ASTM D638
Modulus of Elasticity, MPa [psi]	310 [45,000]	ASTM D638
Glass Transition T <sub>g</sub> , °C	70	ASTM D5418
CTE <sub>α1</sub> , μm/m/°C	89	ASTM E831
CTE <sub>α2</sub> , μm/m/°C	220	ASTM E831

ELECTRICAL PROPERTIES *		
Property	Value	Test Method
Dielectric Constant (1 MHz)	4.46	ASTM D150
Dissipation Factor (1 MHz)	0.03	ASTM D150
Dielectric Withstand Voltage, V	>1,500	MIL-I-46058C
Volume Resistivity, ohm-cm	2.83x10 <sup>15</sup>	ASTM D257
Surface Resistivity, ohms	9.12x10 <sup>14</sup>	ASTM D257

\* Not Specifications  
 N/A Not Applicable





OTHER CURED PROPERTIES *		
Property	Value	Test Method
Refractive Index (20° C)	1.49	ASTM D542
Boiling Water Absorption, % (2 hr)	3.1	ASTM D570
Water Absorption, % (25°C, 24 hr)	1.0	ASTM D570
Linear Shrinkage, %	0.3	ASTM D2566
Thermal Shock, -65°C to 125°C	50 cycles	MIL-I-46058C
Moisture Resistance	Passes	MIL-I-46058C
Fungus Resistance (ASTM G21-13)	Passes	MIL-I-46058C

### CURING GUIDELINES

UV-curing guidelines for 9-20557 at 0.003 in (0.076 mm)

Dymax Curing System (Intensity)	Fixture Time or Belt Speed A
5000-EC (225 mW/cm <sup>2</sup> ) <sup>A</sup>	20 s
UVCS Conveyor with Fusion D lamp (2.5 W/cm <sup>2</sup> ) <sup>B</sup>	3.0 m/min [10 ft/min]
UVCS Conveyor with one 5000-EC (250 mW/cm <sup>2</sup> ) <sup>B</sup>	1.0 m/min [3 ft/min]

<sup>A</sup> Intensity was measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL™ 50 Radiometer.

<sup>B</sup> Intensity was measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL™ 160 Radiometer.

### SECONDARY HEAT CURE



Heat can be used as a secondary cure mechanism where the adhesive cannot be cured with light. Light curing must be done prior to heat cure. The following heat-cure schedule may be used:

Temperature	Time*
110°C [230°F]	60 minutes
120°C [250°F]	30 minutes
150°C [300°F]	15 minutes

\*Note: Actual heat cure time may vary due to part configuration, volume of adhesive applied, and oven efficiency.

### DEPTH OF CURE

The graphs below show the increase in depth of cure as a function of exposure time with two different lamps at different intensities. A 9.5 mm [0.37 in] diameter specimen was cured in a polypropylene mold and cooled to room temperature. It was then released from the mold and the cure depth was measured.

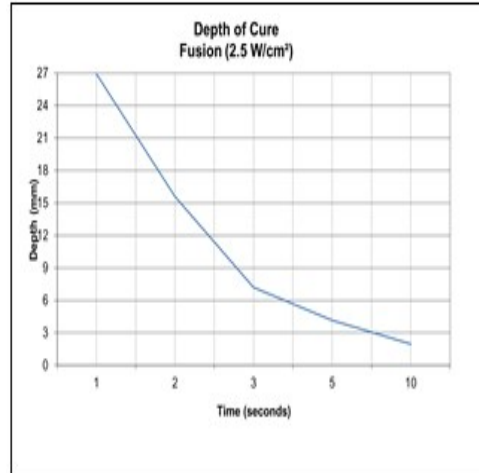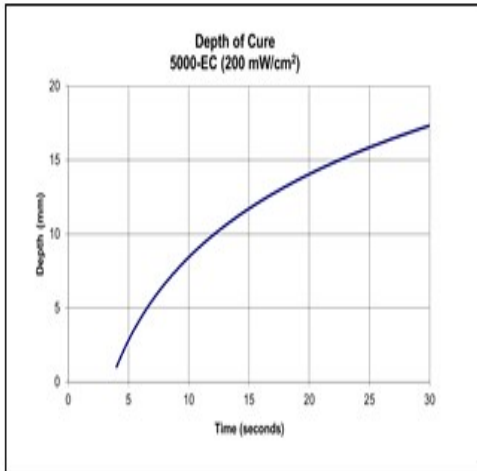

### OPTIMIZING PERFORMANCE AND HANDLING

1. This product cures with exposure to UV and visible light. Exposure to ambient and artificial light should be kept to a minimum before curing. Dispensing components including needles and fluid lines should be 100% light blocking, not just UV blocking.
2. All surfaces in contact with the material should be clean and free from flux residue, grease, mold release, or other contaminants prior to dispensing the material.
3. Cure speed is dependent upon many variables, including lamp intensity, distance from the light source, required depth of cure, thickness, and percent light transmission of components between the material and light source.
4. Oxygen in the atmosphere may inhibit surface cure. Surfaces exposed to air may require high-intensity (>100 mW/cm²) UV light to produce a dry surface cure. Flooding the curing area with an inert gas, such as nitrogen, can also reduce the effects of oxygen inhibition.
5. Parts should be allowed to cool after cure before testing and subjecting to any loads or electrical testing.
6. In rare cases, stress cracking may occur in assembled parts. Three options may be explored to eliminate this problem. One option is to heat anneal the parts to remove molded-in stresses. A second option is to open any gap between mating parts to reduce stress caused by an interference fit. The third option is to minimize the amount of time the liquid material remains in contact with the substrate(s) prior to curing.
7. Light curing generally produces some heat. If necessary, cooling fans can be placed in the curing area to reduce the heating effect on components.
8. At the point of curing, an air exhaust system is recommended to dissipate any heat and vapors formed during the curing process.

### DISPENSING SUPPORT

The Dymax Application Engineering team is ready to discuss your application requirements to provide the most appropriate dispensing and/or spraying solution. Visit our current dispensing equipment portfolio [here](#) or consult our [global contact](#) phone numbers and online chat feature (available in North America only) during normal business hours for instant support.

### STORAGE AND SHELF LIFE

Store the material in a cool, dark place when not in use. Do not expose to light. This product may polymerize upon prolonged exposure to ambient and artificial light. Keep covered when not in use. This material shelf life noted on page 1 of this document, when stored between 10°C (50°F) and 32°C (90°F) in the original, unopened container.

### PERFORMANCE AFTER TEMPERATURE EXPOSURE

Dymax light-curable materials typically have a lower thermal limit of -54°C [-65°F] and an upper limit of 150°C [300°F]. Many Dymax products can withstand temperatures outside of this range for short periods of time, including typical wave solder processes and reflow profiles. Please contact Dymax Application Engineering for assistance.



## ELECTRONIC CIRCUIT BOARD MATERIALS 9-20557-LV Product Data Sheet

### CLEAN UP

Uncured material may be removed from dispensing components and parts with organic solvents. Cured material will be impervious to many solvents and difficult to remove. Cleanup of cured material may require mechanical methods such as ultrasonic bath, water jet, vacuum tweezers, air knife and/or warming to aid in the removal.

### GENERAL INFORMATION

This product is intended for industrial use only. Keep out of the reach of children. Avoid breathing vapors. Avoid contact with skin, eyes, and clothing. Wear impervious gloves. Repeated or continuous skin contact with uncured material may cause irritation. Remove material from skin with soap and water. Never use organic solvents to remove material from skin and eyes. For more information on the safe handling of this material, please refer to the Safety Data Sheet before use.

The data provided in this document are based on historical testing that Dymax performed under laboratory conditions as they existed at that time and are for informational purposes only. The data are neither specifications nor guarantees of future performance in a particular application. Dymax does not guarantee that this product's properties are suitable for the user's intended purpose.

Numerous factors—including, without limitation, transport, storage, processing, the material with which the product is used, and the ultimate function or purpose for which the product was obtained—may affect the product's performance and/or may cause the product's actual behavior to deviate from its behavior in the laboratory. None of these factors are within Dymax's control. Conclusions about the behavior of the product under the user's particular conditions, and the product's suitability for a specific purpose, cannot be drawn from the information contained in this document.

It is the user's responsibility to determine (i) whether a product is suitable for the user's particular purpose or application and (ii) whether it is compatible with the user's intended manufacturing process, equipment, and methods. Under no circumstances will Dymax be liable for determining such suitability or compatibility. Before the user sells any item that incorporates Dymax's product, the user shall adequately and repetitively test the item in accordance with the user's procedures and protocols. Unless specifically agreed to in writing, Dymax will have no involvement in, and shall under no circumstances be liable for, such testing.

Dymax makes no warranties, whether express or implied, concerning the merchantability of this product or its fitness for a particular purpose. Nothing in this document should be interpreted as a warranty of any kind. Under no circumstances will Dymax be liable for any injury, loss, expense or incidental or consequential damage of any kind allegedly arising in connection with the user's handling, processing, or use of the product. It is the user's responsibility to adopt appropriate precautions and safeguards to protect persons and property from any risk arising from such handling, processing, or use.

The specific conditions of sale for this product are set forth in Dymax's [General Terms & Conditions of Sale](#). Nothing contained herein shall act as a representation that the product use or application is free from patents owned by Dymax or any others. Nothing contained herein shall act as a grant of license under any Dymax Corporation Patent.

Except as otherwise noted, all trademarks used herein are trademarks of Dymax. The "®" symbol denotes a trademark that is registered in the U.S. Patent and Trademark Office.

The contents of this document are subject to change. Unless specifically agreed to in writing, Dymax shall have no obligation to notify the user about any change to its content.

### CONTACT DYMAX

[www.dymax.com](http://www.dymax.com)

#### Americas

USA | +1.860.482.1010 | [info@dymax.com](mailto:info@dymax.com)

#### Europe

Germany | +49 611.962.7900 | [info\\_de@dymax.com](mailto:info_de@dymax.com)

Ireland | +353 21.237.3016 | [info\\_ie@dymax.com](mailto:info_ie@dymax.com)

#### Asia

Singapore | +65.67522887 | [info\\_ap@dymax.com](mailto:info_ap@dymax.com)

Shenzhen | +86.755.83485759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)

Hong Kong | +852.2460.7038 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)

Korea | +82.31.608.3434 | [info\\_kr@dymax.com](mailto:info_kr@dymax.com)