



# ACCU-CAL™ 50V

Visible Radiometer User Guide





## About Dymax

UV/Visible light-curable adhesives. Systems for light curing, fluid dispensing, and fluid packaging.

Dymax manufactures industrial, light-curable, epoxy, and activator-cured adhesives. We also manufacture a complete line of manual fluid dispensing systems, automatic fluid dispensing systems, and light-curing systems. Light-curing systems include LED light sources, spot, flood, and conveyor systems designed for compatibility and high performance with Dymax adhesives.

Dymax adhesives and light-curing systems optimize the speed of automated assembly, allow for 100% in-line inspection, and increase throughput. System designs enable stand-alone configuration or integration into your existing assembly line.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application, and use is strictly limited to that contained in the Dymax standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request.

# Contents

<b>Introduction</b> .....	<b>3</b>
<b>Safety</b> .....	<b>4</b>
General Safety .....	4
Safety .....	5
<b>Product Overview</b> .....	<b>5</b>
<b>Unpacking</b> .....	<b>6</b>
Parts Included for Spot Configuration .....	6
Parts Included for Flood Configuration.....	6
<b>Operation</b> .....	<b>7</b>
<b>Maintenance</b> .....	<b>8</b>
<b>Spare Parts and Accessories</b> .....	<b>8</b>
<b>Specifications</b> .....	<b>8</b>
<b>Warranty</b> .....	<b>9</b>
<b>Index</b> .....	<b>10</b>

# Introduction

The enclosed ACCU-CAL™ 50V visible radiometer was developed and manufactured by the Dymax team, driven by a desire to best serve your needs. Before shipping, your ACCU-CAL™ 50V visible radiometer was calibrated and tested against standard visible light sources to ensure accurate performance.

The operation of this radiometer in conjunction with a visible light-curing system will maximize safety and user-friendly performance and provide optimum yield of your technological process.

Therefore, we encourage you to read, understand, and follow all safety and operating instructions and recommendations compiled in this and other related manuals prior to setting up and operating this instrument and any associated visible light-curing systems.

If you encounter a problem, have any questions, or would like to help us with your suggestions or recommendations, please contact our Technical or Customer Service Departments at 860-482-1010. Trained Dymax professionals are standing by to assist.

Par conséquent, nous vous encouragez à lire, comprendre, et suivre toute sécurité et instructions d'opération et recommandations rédigées dans cette et autres manuels établis avant de mettre en place et de faire fonctionner ce nouveau système de lampe de tâche ou ces composants individuels.

Si vous rencontrez un problème, avez n'importe quelle question, ou si vous voudriez de nous aider avec vos suggestions ou recommandations, s'il vous plaît contactez notre département technique ou service client à 860-482-1010. Dymax formé professionnels attendent de vous servir.

## Safety

### General Safety

Before continuing, please read the following chapters of this manual for safety recommendations and installation, running, and troubleshooting instructions.



**CAUTION!** Always wear protective goggles or a face shield when working near the front of any unit which emits UV light! The rear of some units also emits stray UV light.

**WARNING!** Always observe safety requirements

**PRÉ-CAUTION!** *Toujours faire de l'usage des lunettes de protection ou protéger de visage marche près du devant d'élément!*

**PRÉ-CAUTION!** *Risque de décharge électrique quand le couvert est enlever!*

**ACHTUNG!** *Tragen Sie immer eine Sicherheitsbrille oder einen Gesichtsschutz, wenn Sie nahe an der UV Lichtquelle arbeiten. Die Rückseite des Gerätes emittiert gestreutes UV Licht!*

**WARNHINWEIS!** *Bitte beachten Sie immer die Sicherheitshinweise!*

## Safety

The ACCU-CAL™ 50V visible radiometer is designed to be used in conjunction with Dymax UV/Visible light-curing equipment that is properly set up, with components correctly connected, and operated in accordance with relevant instructions.

### Safety Recommendations

- When working with UV or visible light sources, use goggles (provided) or a face shield approved for UV protection to protect your eyes.
- Long-sleeved shirts or a lab coat are recommended to protect the arms, and use of UV opaque gloves will protect the hands.

## Sécurité

L'équipement être conçu pour être utilisé correctement constituer, avec composants brancher correctement, et marché en conformément avec instructions important. Le plan états développer pour rendre au maxime opérateur sécurité et minimiser exposition à ultraviolette.

### Recommander de sécurité

- Emploi lunettes, ou un protéger de visage pour protection de ultraviolet pour protéger vous yeux.
- Chemises à manche long, ou manteau de labo, sont recommander pour protéger les bras, et utilisation de ultraviolette gants opaque vais protéger les mains.

## Sicherheitshinweise

Dieses Gerät wurde so entwickelt, dass es nur vollständig, alle Komponenten korrekt miteinander verbunden, in Übereinstimmung mit relevanten Instruktionen betrieben wird. Bei der Entwicklung wurde weiterhin großen Wert auf die Benutzersicherheit und minimale UV Belastung gelegt.

### Sicherheitshinweise:

- Tragen Sie immer die mitgelieferten Sicherheitsbrille oder speziellen Gesichtsschutz, der Ihre Augen vor UV Licht schützt.
- Wir empfehlen Langarm - Hemden oder einen Laborkittel zu tragen, um die Arme zu schützen. Für die Hände empfehlen wir UV- geblockte Handschuhe.

## Product Overview

The ACCU-CAL™ 50V radiometer is a microprocessor-based measurement instrument designed to measure visible radiation in the range of 395-465 nm.

The ACCU-CAL™ 50V uses two AA batteries.

### Environmental Considerations

- Optical measurement instruments are sensitive to extremes in environmental conditions like high temperature, humidity, and contamination. Protect the device and its detector(s) from high humidity, high temperature, direct sunlight, and contamination.
- Do not use the ACCU-CAL™ 50V radiometer immediately after having taken it from a cold into a warm environment. Under certain circumstances, condensation could develop and may cause inaccurate measurement results. Allow the device to adjust to room temperature before use.
- Do not use the ACCU-CAL™ 50V radiometer in powerful magnetic, electromagnetic, or electrostatic fields. These disturbances may influence measurement results.

# Unpacking

When your radiometer arrives, inspect the box for damage and notify the shipper of box damage immediately.

Open the box and check for equipment damage. If parts are damaged, notify the shipper and submit a claim for the damaged parts. Contact Dymax so that new parts can be shipped to you immediately.

Check that the parts included in your order match those listed below. If parts are missing, contact your local Dymax representative or Dymax Customer Support to resolve the problem.

**Figure 1.**  
Model 40043 Visible Spot Radiometer



**Figure 2.**  
Model 40044 Visible Flood Radiometer



## Parts Included for Spot Configuration

- ACCU-CAL 50V Radiometer
- ACCU-CAL 50V Radiometer User Guide
- 3-mm, 5-mm, 8-mm Lightguide Adapters
- Lightguide Simulator (PN 38408)
- 2-mm Hex Wrench
- Spare Adapter Screws
- Carrying Case

## Parts Included for Flood Configuration

- ACCU-CAL 50V Radiometer
- ACCU-CAL 50V Radiometer User Guide
- Carrying Case

**Note:** The ACCU-CAL™ 50V Radiometer detector and optometer are calibrated together and are a matched pair. Switching the detector or optometer to pieces which were not calibrated as a matched pair will lead to inaccurate readings.

# Operation

1. The ACCU-CAL™ 50V Radiometer may be used to measure visible light intensity from flood lamps, or spot lamp visible-light intensity from the end of a 3-mm, 5-mm, or 8-mm lightguide. For flood lamp use, attach the detector to the radiometer as shown in Figure 3.
2. For spot lamp use, select an adapter that matches the size of the lightguide that is installed on the spot lamp. 3-mm, 5-mm, and 8-mm adapters are available.
3. Install the Lightguide Adapter on the end of the Detector using the two, 2-mm screws provided.
4. Attach the Lightguide Adapter to the Spot Lamp Lightguide by inserting the Lightguide into the Lightguide Adapter until it bottoms out. Tighten the set screw when the Lightguide is installed.
5. Press and release the On/Off Key on the Face Plate to turn the Radiometer on and off.
6. Press and release the Light Source Key to select the light source being measured. The different light source options are:
  - **Flood Lamp** - For use when measuring energy of a flood-lamp light source.
  - **3-mm Lightguide** - For use when measuring energy at the end of a 3-mm lightguide.
  - **5-mm Lightguide** - For use when measuring energy at the end of a 5-mm lightguide.
  - **8-mm Lightguide** - For use when measuring energy at the end of a 8-mm lightguide.
7. Press and release the Mode Key to select between the meters operating modes. The different operating modes are:
  - **Peak Intensity** - Shows the highest visible-light intensity in  $\text{mW}/\text{cm}^2$  seen by the detector during the measurement.
  - **Intensity** - Shows the visible-light intensity in  $\text{mW}/\text{cm}^2$  at the detector during the measurement.
  - **Dose** - Shows the total visible-light dose in  $\text{mJ}/\text{cm}^2$  at the detector during the measurement.


**Figure 3.**  
Radiometer with Detector




**Figure 4.**  
Adapter Installation



**Figure 5.**  
Attach Lightguide Adapter to Lightguide (Step 4)

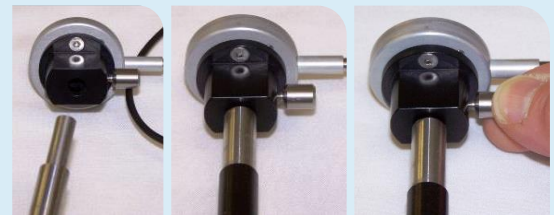

**Figure 6.**  
Face Plate

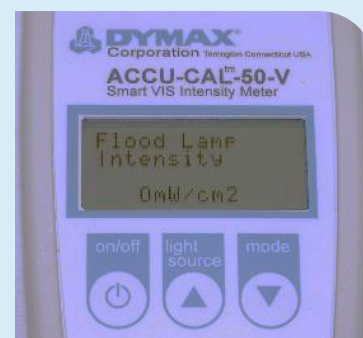

# Maintenance

The ACCU-CAL™ 50V was designed to operate with minimum maintenance. Follow the schedule below to assure top unit performance.

- Calibrate the instrument at least annually. Calibration service is available through Dymax Customer Service or Dymax Product Repair.
- Change the batteries when a low battery warning is received. The ACCU-CAL™ 50V uses two AA-type batteries. The battery compartment is on the back of the instrument.
- Keep the detector head's sensing element clean and free of contaminants. The detector head may be cleaned with a clean tissue wetted with isopropyl alcohol.

**Figure 7.**  
Battery Compartment (Closed & Open)



# Spare Parts and Accessories

Item	Part Number
Adapter Kit – Flood to Spot Model (includes parts listed below)	39554
Lightguide Simulator	38408
8-mm Lightguide Adapter	39558
5-mm Lightguide Adapter	39557
3-mm Lightguide Adapter	39556

# Specifications



Property	Specification
Power	Two AA size batteries
Display	LCD Graphic Display 97x 32 Pixel Display area: 0.56 in x 1.41 in (14.3 mm x 35.8 mm)
Detector Interface	9-Pin MDSM9 socket, 4 inputs
Measurement Ranges	Four modes of operation Auto range within each operating mode
Front Panel Control	3 buttons
Temperature	Operating: 5 to 40°C Storage: -10 to 50° C
Size	5.71 in x 2.48 in x 1.18 in (145 mm x 63 mm x 30 mm)
Weight	0.33 lbs (150 g)



## Warranty

From date of purchase, Dymax Corporation offers a one-year warranty against defects in material and workmanship on the ACCU-CAL™ 50V, except the batteries, with proof of purchase date. Unauthorized repair, modification, or improper use of equipment may void your warranty benefits. The use of aftermarket replacement parts not supplied or approved by Dymax Corporation will void any effective warranties and may result in damage to the equipment.

***IMPORTANT NOTE: DYMAX CORPORATION RESERVES THE RIGHT TO INVALIDATE ANY WARRANTIES, EXPRESSED OR IMPLIED, DUE TO ANY REPAIRS PERFORMED OR ATTEMPTED ON DYMAX EQUIPMENT WITHOUT WRITTEN AUTHORIZATION FROM DYMAX. THOSE CORRECTIVE ACTIONS LISTED ABOVE ARE LIMITED TO THIS AUTHORIZATION.***

# Index

Accessories.....	8
Help.....	4
Introduction.....	4
Maintenance.....	8
Operation.....	7
Parts List.....	6
Product Description.....	5
Product Overview.....	5
Safety.....	4
Spare Parts.....	8
Specifications.....	8
Unpacking.....	6
Warranty.....	9





[www.dymax.com](http://www.dymax.com)

**Americas**

USA | +1.860.482.1010 | [info@dymax.com](mailto:info@dymax.com)

**Europe**

Germany | +49 611.962.7900 | [info\\_de@dymax.com](mailto:info_de@dymax.com)  
Ireland | +353 21.237.3016 | [info\\_ie@dymax.com](mailto:info_ie@dymax.com)

**Asia**

Singapore | +65.67522887 | [info\\_ap@dymax.com](mailto:info_ap@dymax.com)  
Shanghai | +86.21.37285759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Shenzhen | +86.755.83485759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Hong Kong | +852.2460.7038 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
Korea | +82.31.608.3434 | [info\\_kr@dymax.com](mailto:info_kr@dymax.com)

© 2018-2021 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax Europe GmbH does not warrant the data contained in this bulletin. Any warranty applicable to products, its application and use is strictly limited to that contained in Dymax Europe GmbH's General Terms and Conditions of Sale published on our website. Dymax Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax Corporation or act as a grant of license under any Dymax Corporation Patent. Dymax Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide. PN40518 MAN003EU 5/24/2021