






## UVC-8 Light-Curing Conveyor System

- Maintenance-free, Teflon®-coated belt with adjustable belt drive (0.5-12 m/min range)
- Controlled and consistent cure times
- Reliable, heavy-duty conveyor design
- Optional intensity adjustment (40-100%)
- Ideal for use in laboratories and for small-size production
- Lamp height adjustment (60 - 100 mm) to accommodate various part heights
- Digital control panel, compact PLC
- Ideal for curing on a variety of substrates including glass, metal, plastic, printed circuit boards, and paper
- Fully shielded lamp enclosures
- Fast cures for high throughput
- 220-mm belt width
- Aluminum lamp reflectors
- Optional dichroic lamp reflectors and IR filters for curing on temperature sensitive substrates are also available
- Optional PLC with UV monitoring on request

The Dymax UVC-8 Conveyor is designed for curing UV/Visible light-curable adhesives, coatings, and inks. This cost-efficient and versatile conveyor system is perfect for both production and lab environments, and can be used in a number of different industries. Typical substrates that are bonded, coated, or encapsulated include paper, plastic, metal, glass, laminated materials, printed circuit boards, and many others.

The UVC-8 Conveyor is equipped with a 220-mm wide Teflon®-coated belt and can be outfitted with one, two, or three UV lamps. The distance between the lamp and the belt can be manually adjusted (between 60-100 mm) as well as the belt speed (0.5-12 m/min). This enables the operator to tailor the curing conditions to the specific application. The conveyor also features a digital control panel where various parameters such as operating hours, lamp current, and the UV set point can be monitored.

Specifications	
<b>Electrical Requirements</b>	3 x 400V/N/PE, 50 Hz
<b>Number of Lamps</b>	1, 2, or 3 UV lamps
<b>Lamp Power</b>	2000 W per bulb
<b>Intensity (UVA)</b>	800 mW/cm <sup>2</sup> (typical Intensity new bulb at 60 mm distance)*
<b>Vertical Clearance</b>	Adjustable 60-100 mm
<b>Dimensions (W x L x H)</b>	1,100 mm x 1,000 mm x 1,200 mm
<b>Working Height (Floor to Belt)</b>	900 mm on wheel kit or 900 - 950 mm with adjustable screws
<b>Control</b>	Compact PLC
<b>Belt Material</b>	Teflon®-coated fiberglass
<b>Belt Width</b>	220 mm
<b>Belt Speed</b>	Adjustable from 0.5-12 m/min
<b>Bulbs</b>	Metal Halide (Fe) - Standard, Mercury (Hg), Gallium (Ga)
<b>Air Exhaust</b>	500 m <sup>3</sup> /h
<b>Net Weight</b>	180 kg

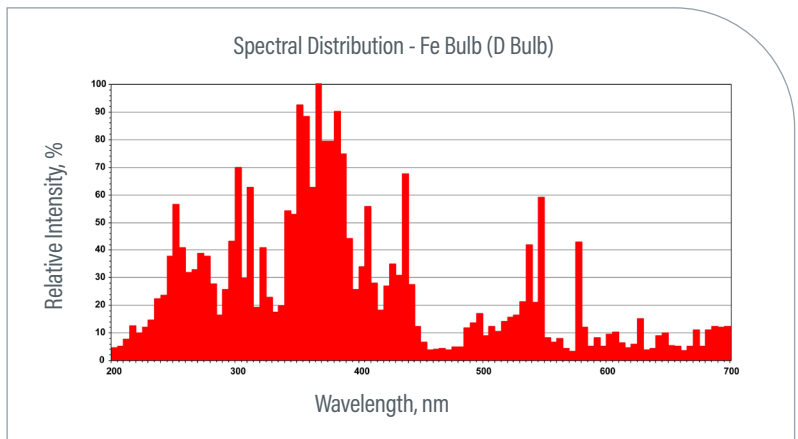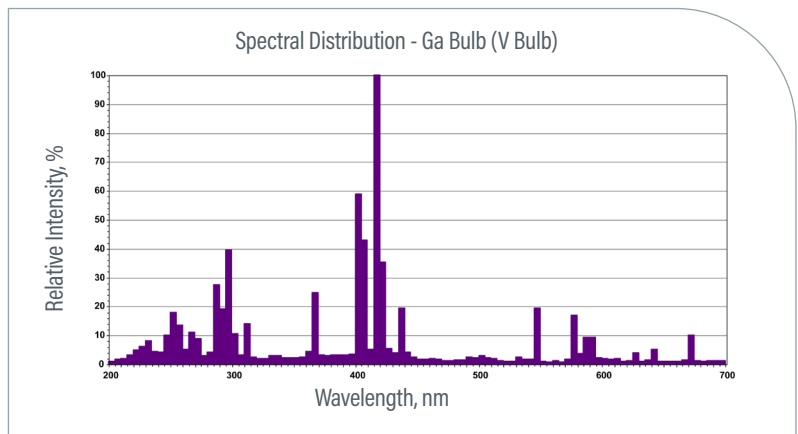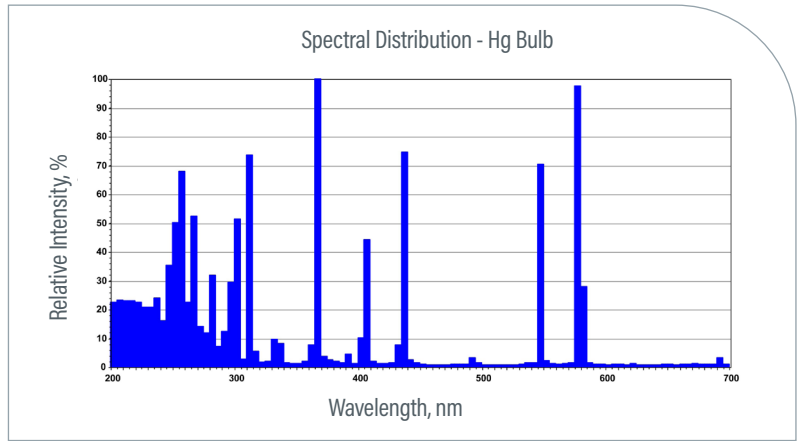

[www.dymax.com](http://www.dymax.com)

#### Americas

USA | +1.860.482.1010 | [info@dymax.com](mailto:info@dymax.com)

#### Europe

Germany | +49 611.962.7900 | [info\\_de@dymax.com](mailto:info_de@dymax.com)  
 Ireland | +353 21.237.3016 | [info\\_ie@dymax.com](mailto:info_ie@dymax.com)

#### Asia

Singapore | +65.67522887 | [info\\_ap@dymax.com](mailto:info_ap@dymax.com)  
 Shanghai | +86.21.37285759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
 Shenzhen | +86.755.83485759 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
 Hong Kong | +852.2460.7038 | [dymaxasia@dymax.com](mailto:dymaxasia@dymax.com)  
 Korea | +82.31.608.3434 | [info\\_kr@dymax.com](mailto:info_kr@dymax.com)

©2020 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax Europe GmbH does not warrant the fitness of the product for the intended application. Any warranty applicable to products, its application and use is strictly limited to that contained in Dymax Europe GmbH's General Terms and Conditions of Sale published on our website. Dymax Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax Corporation or act as a grant of license under any Dymax Corporation Patent. Dymax Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide.