

# Model 200 Hand-Held Valve Dispensing Systems

The Dymax Model 200 is a manually controlled dispensing system. Accurate dispensing is achieved through the use of a unique normally-closed, hand-held diaphragm valve. The diaphragm valve is designed with a wand-style body to make it more ergonomic for users. Dymax hand-held dispensing systems can be used for a variety of applications including dot, bead, and potting applications.

## Special Features of the Dispensing System

Dymax hand-held fluid dispensing systems are engineered for optimal performance and long service life. Key features include:







- Compatibility with Dymax packages of UV light-curable adhesives, epoxy resins, cyanoacrylates, and activator-cured adhesives
- High-quality, light-blocking polyethylene fluid tubing in two sizes -  $\frac{3}{8}$ " OD for maximum flow and  $\frac{1}{4}$ " OD to provide flexibility for easy handling
- High-quality, air precision regulator supplied for precise fluid control
- Air filter regulator includes an integrated shutoff valve and pressure exhaust to quickly and safely depressurize the system, eliminating the need for the operator to open and close the regulator
- Easy-to-open, swing-down toggles on the bottle and pail reservoir

## Systems Include:


Handheld Dispensing Valve	Dispensing Valve Stand
Air Filter/Regulator - 0-100 psi (0-6.9 bar)	Air Line Kit - $\frac{1}{4}$ " (6.3 mm) OD tubing
Fluid Line Kit - 6 ft of Black $\frac{3}{8}$ " (9.5 mm) OD tubing	Air Line Kit - $\frac{1}{4}$ " (6.3 mm) OD tubing with fitting on one end
Fluid Line Kit - 6 ft of Black $\frac{1}{4}$ " (6.3 mm) OD tubing and $\frac{3}{8}$ " - $\frac{1}{4}$ " (9.5 mm - 6.3 mm) reducer and two $\frac{3}{8}$ " - $\frac{1}{4}$ " (9.5 mm - 6.3 mm) stem fitting inserts	Air Precision Regulator - Includes three Pressure Gauges (0-30 psi, 0-60 psi, & 0-100 psi) (0-2 bar, 0-4.1 bar, & 0-6.9 bar)
Selected Reservoir	

## Select System Based on Fluid Package Used

Select system part number in **red** from table.

	No Reservoir	Cartridge Drop-In			Large Bottle Drop-In	Pail Drop-In
		6 oz [160 mL]	12 oz [300 mL]	20 oz [550 mL]	Up to 1 Gallon	Up to 15 Liter Straight or Taper
						
	<b>T20050</b>	<b>T20065</b>	<b>T20085</b>	<b>T20105</b>	<b>T20145</b>	<b>T20165</b>

## Representative Model 200 Dispensing System (T20145 with Bottle Reservoir Shown Below)

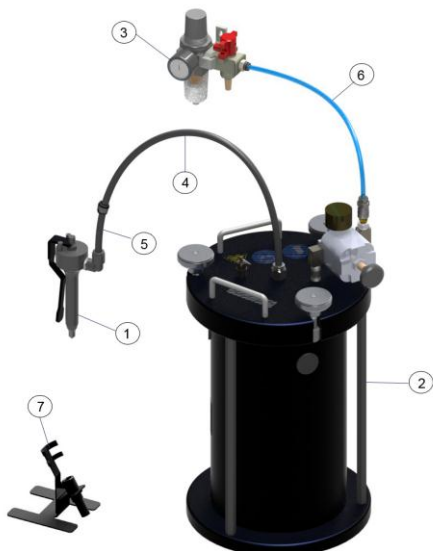


Item	Part Number	Description
1	T15218	Model 200 Diaphragm Valve
2	T17004	Bottle Drop-In Tank Assembly - with High-Precision Regulator
3	T16307	Filter Regulator
4	T16787	6 FT of Fluid Line Kit - Black 3/8" OD PE
5	T16793	6 FT of Fluid Line Kit - Black 1/4" OD PE
6	T16789	Reservoir Airline Kit
7	T15466	Valve Stand

### System Specifications

Compressed Air Supply	80 to 100 psi (5.5 to 6.9 bar)
-----------------------	--------------------------------

## Representative Model 200 Dispensing System (T20105 with Cartridge Reservoir Shown Below)

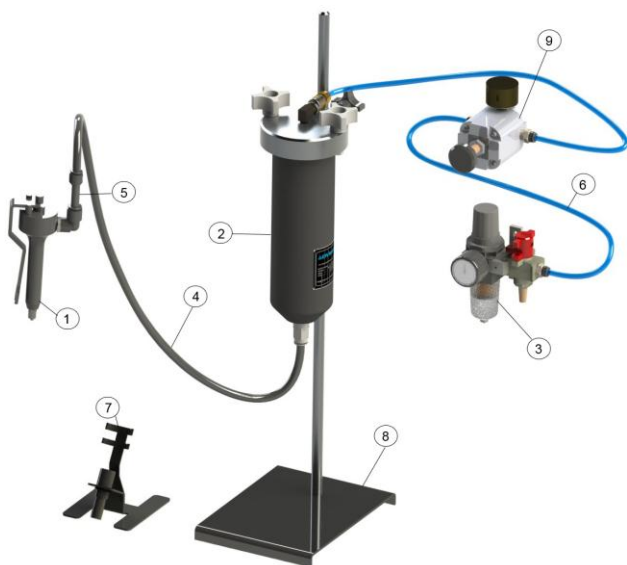

Item	Part Number	Description
1	T15218	Model 200 Diaphragm Valve
2	T15223	550 mL (20 oz) Reservoir
3	T16307	Filter Regulator
4	T16787	6 FT of Fluid Line Kit - Black 3/8" OD PE
5	T16793	6 FT of Fluid Line Kit - Black 1/4" OD PE
6	T16789	Reservoir Airline Kit
7	T15466	Valve Stand
8	T15279	24" Lab Stand
9	T16629	High-Precision Regulator

### System Specifications

Compressed Air Supply	80 to 100 psi (5.5 to 6.9 bar)
-----------------------	--------------------------------



© 2011-2012 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request.

PB002DA 7/26/2011

Dymax Corporation  
860.482.1010  
info@dymax.com  
[www.dymax.com](http://www.dymax.com)

Dymax Oligomers & Coatings  
860.626.7006  
oligomers&coatings@dymax.com  
[www.dymax-oc.com](http://www.dymax-oc.com)

Dymax Europe GmbH  
+49 (0) 611.962.7900  
info\_de@dymax.com  
[www.dymax.de](http://www.dymax.de)

Dymax UV Adhesives & Equipment (Shenzhen) Co Ltd  
+86.755.83485759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax UV Adhesives & Equipment (Shanghai) Co Ltd  
+86.21.37285759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Asia (H.K.) Limited  
+852.2460.7038  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Korea LLC  
82.2.784.3434  
info@dymax.kr  
[www.dymax.co.kr](http://www.dymax.co.kr)