

# SD-100 Digital Syringe Dispenser

## CE Marked – Available Globally

The SD-100 digital syringe dispenser accurately dispenses low-to-high viscosity materials from a syringe. Operators are able to quickly and easily set up the system for the deposit size needed with the digital timer control and adjustable pressure gauge. This dispensing system is ideal for use as an operator work station and can also be integrated into an automated process by connecting an external signal to the system input.




The SD-100 System Includes:

- SD-100 digital syringe dispense controller
- Air cap adapters, 1 each for 3, 5, 10, and 30/55 mL
- Air hose and fittings
- Foot switch
- Syringe stand
- Start-up kit containing assorted dispense tips
- Printed user manual



BENEFITS	FEATURES
Precision control over fluid dispense	Digital timer with a range of 0.01 to 9999 seconds
Delivers micro-shots, beads, or fills	Timed or manual mode with adjustable time and pressure settings; includes the ability to set time using a teach mode
Clean, drip-free shut-off	Adjustable vacuum suck-back
Manual or system-integrated operation	Activation by foot pedal or external signal
Reduced operator fatigue	Replaces manual syringe dispensing and squeeze bottles
Saves space	Small footprint

SPECIFICATIONS	
Part Number	<b>T17242</b> International Version (no power cord)
	<b>T17241</b> Asian Version (type G power cord)
Power Requirements	90-260 VAC
Air Pressure Requirements	5-7 bar (70-100 psi)
Gauge Tolerance	+/- 3%
Timer	0.01 to 9999 seconds, +/- 1%; manual or timed mode
Activation	Foot switch or external signal
Dimensions (W x D x H)	22 cm x 21 cm x 6.7 cm (8.625" x 8.5" x 2.625")
Weight	1 kg (2.2 lbs.)
Unit Warranty	2 years from purchase
Recommended Accessories	<b>T16307</b> Filter Regulator with Dump Valve
	<b>T15505</b> 3-Hole Suspended Syringe Stand
Replacement Parts	<b>T17600</b> 3 mL, plastic
	<b>T17603</b> 5 mL, plastic
	<b>T17602</b> 10 mL, plastic
	<b>T17601</b> 30/55 mL, plastic
	<b>T15466</b> Syringe Stand
	<b>T17253</b> Foot Switch

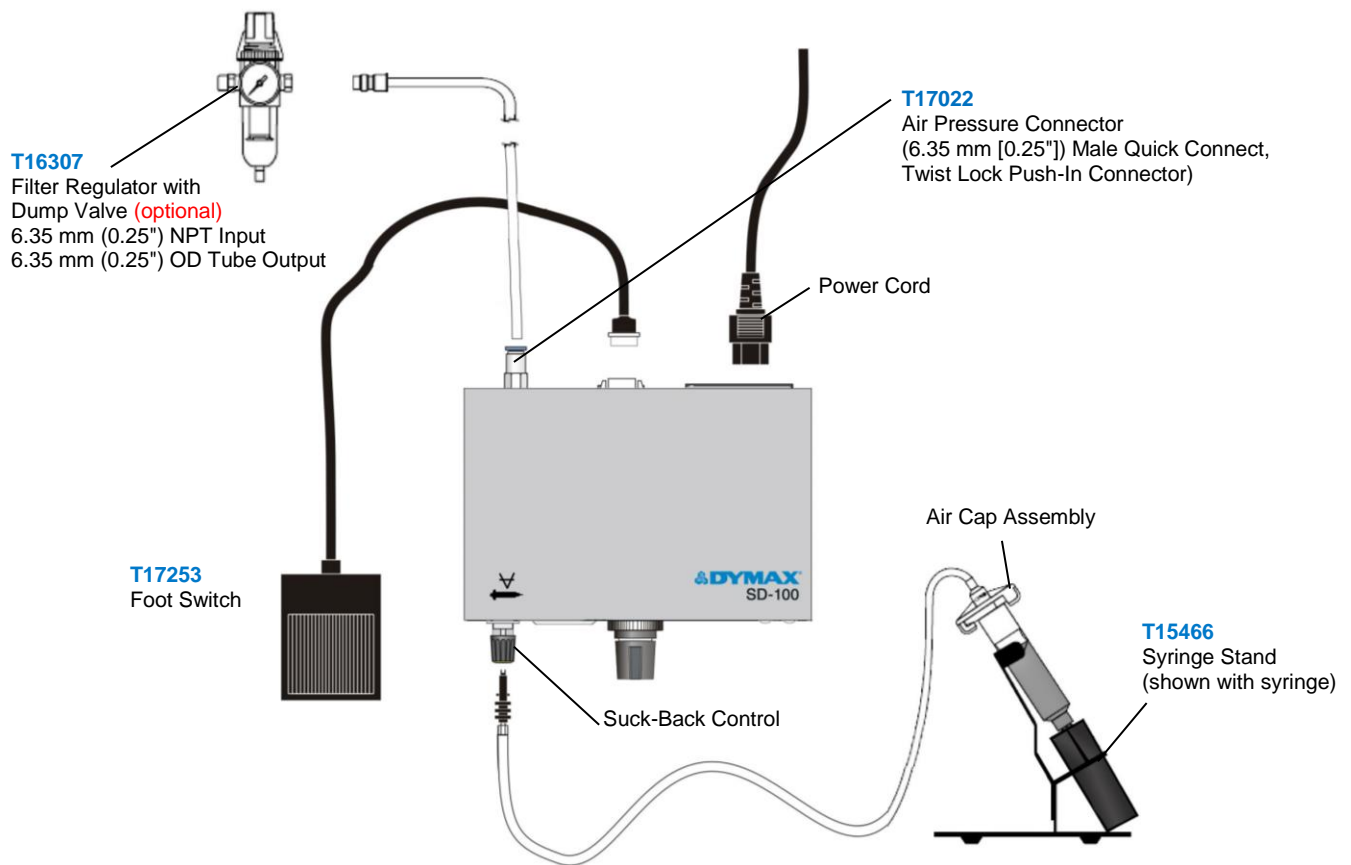

© 2012-2016 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation. Data sheets are available for valve controllers or pressure pots upon request. PB008DA 7/5/2016

Dymax Corporation  
+1.860.482.1010 | info@dymax.com | [www.dymax.com](http://www.dymax.com)

Dymax Europe GmbH  
+49 611.962.7900 | info\_de@dymax.com | [www.dymax.de](http://www.dymax.de)

Dymax Engineering Adhesives Ireland Ltd.  
+353 21.237.3016 | info\_ie@dymax.com | [www.dymax.ie](http://www.dymax.ie)

Dymax Oligomers & Coatings  
+1.860.626.7006 | info\_oc@dymax.com | [www.dymax-oc.com](http://www.dymax-oc.com)

Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd.  
+86.21.37285759 | dymaxasia@dymax.com | [www.dymax.com.cn](http://www.dymax.com.cn)

Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd.  
+86.755.83485759 | dymaxasia@dymax.com | [www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Asia (H.K.) Limited  
+852.2460.7038 | dymaxasia@dymax.com | [www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Asia Pacific Pte. Ltd.  
+65.6752.2887 | info\_ap@dymax.com | [www.dymax-ap.com](http://www.dymax-ap.com)

Dymax Korea LLC  
+82.2.784.3434 | info\_kr@dymax.com | [www.dymax.com/kr](http://www.dymax.com/kr)