


gasketing

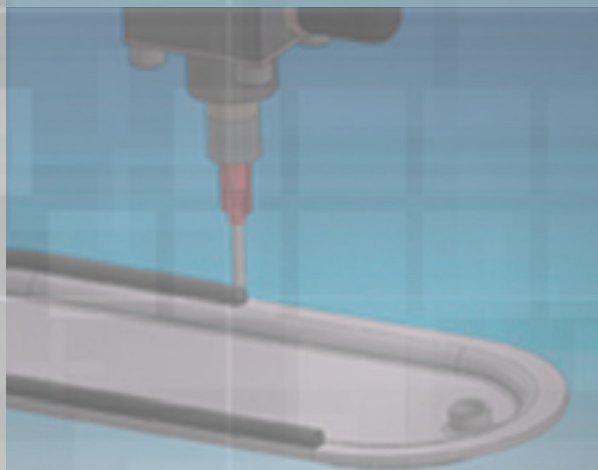

AUTOMOTIVE

MOBILE
DEVICES

LIGHTING

ELECTRICAL
DEVICES

HVAC

ENERGY

INDUSTRIAL
HARDWARE

PRODUCT SELECTOR GUIDE



Our Technology. **YOUR ADVANTAGE.™**

Product **OVERVIEW**



expertise

At Dymax, we combine our product offering with our expert knowledge of light-cure technology. Where others only supply products, we are committed to developing a true collaborative partnership, bringing our total process knowledge to our customer's specific application challenges. Because we understand the process as a whole, and not just individual aspects of it, we can offer our customers a solution where chemistry and equipment work seamlessly together with maximum efficiency. Our solutions help our customers lower costs, increase process efficiency, and become more profitable, giving them a competitive advantage they can't get anywhere else.

Light-Curable Materials.

Dispensing Systems.

Light-Curing Equipment.

Technical Expertise.

Manufacturing is evolving at a faster rate than ever before. Today's complex designs, innovative materials, and increased focus on the environment can present manufacturers with many challenges. Whatever demands or challenges you face, [Dymax](#) is here to work with you and provide the solutions you need for a more efficient process and higher quality end product.

Light-curable form-in-place, cure-in-place [gasket materials](#) are used in automotive, mobile device, lighting, electrical device, HVAC, energy, and industrial hardware applications. They are designed for automated dispensing to support high-volume production and consistency in bead profile for single-wall, flat-surface, or channel configurations. The materials act as a barrier to prevent absorption or penetration of air, dust, noise, liquids, gaseous substances, or dirt for sound dampening, vibration dampening, moisture protection, chemical protection, and air sealing. The [gaskets](#) conform to complex and intricate channels, on both vertical and horizontal surfaces, with thixotropic formulations, and flow into channels with Newtonian formulations. This technology accommodates engineering changes without high tooling investment, helping to reduce costs, and turning problems like production throughput into non-issues.

Dymax is dedicated to reducing environmental impact. Our one-part, 100% solids gasket resins are silicone free and replace technologies that contain hazardous ingredients, produce waste, and require higher amounts of energy to process. We understand that safe, ecologically friendly products benefit our customers, the environment, and us. We have created materials with attributes that lower product costs, life-cycle costs, and ecological impact.



technical consulting

Click on the product numbers for more information.

Gasket Products **SELECTOR GUIDE**

Product Number	Key Properties	Applications	Appearance	Viscosity, cP (20 rpm) Nominal	Durometer	Elongation @ Break, %	Glass Transition Tg °C	Compression Set, % (85°C, 22 h)*	Linear Shrinkage, %	Cure Rate (150 mW/cm ²)**	Jetting Compatible
GA-103	Excellent Heat, Water, and Chemical Resistance / Self-Leveling Liquid / Soft	Fuel Cells / Underwater Enclosures / High-Temperature Sealing	Clear Transparent	60,000	00-75	63	-37	14.9	0.8	10 s	Call Dymax
GA-105	Soft and Sticky / Good Adhesion to Plastics, Metals, and Ceramics	Electrical Enclosures / HVAC Ductwork / Automotive Casings	Clear Translucent	40,000	00-70	140	9	10.4	0.8	10 s	Call Dymax
GA-108	Good Adhesion to Nylon and Metals / Soft and Tacky	Speaker Assembly / Electrical Enclosures / Automotive Enclosures / Appliance Casings / Automotive Door Handles / HVAC Ductwork	Black Translucent	45,000	00-65	220	-19	41.1	1.8	7 s	Yes
GA-112	Soft and Tack-Free / Excellent Tear Resistance / Moisture Resistant / Adhesion to Metals	Appliance Housings / Critical Electronic Assemblies and Devices / Electrical Conduit Boxes	Black Translucent	40,000	A50	360	24	15.0	1.5	15 s	Yes
GA-120	Flexible / Soft and Tacky / Self-Leveling Viscosity / Greatest Deflection	Speaker Assembly / Sound Dampening / Automotive Enclosures	Clear Transparent	1,000	00-50	110	-43	0.17	1.2	7 s	Call Dymax
GA-140	Moisture and Chemical Resistant / Cures Soft and Tack Free / Low Outgassing / Adhesion to Plastics	Fuel Cells / Automotive Door Handles / Appliance Housings / Critical Electronic Assemblies and Devices	Clear Translucent	39,000	A35	167	13	14.9	2.0	10 s	Yes
GA-142	Soft, Sticky and Flexible / Good Adhesion to Nylon, Plastics, and Metals	Speaker Assembly / Electrical Enclosures / Automotive Enclosures / Appliance Casings / Automotive Door Handles / HVAC Ductwork	Clear Translucent	39,000	00-50	330	3.7	31.0	1.6	4 s	Call Dymax
GA-145	Moisture and Chemical Resistant / Cures Tack Free / Low Outgassing	Fuel Cells / Automotive Door Handles / Appliance Housings / Critical Electronic Assemblies and Devices	Black Translucent	45,000	00-68	130	-13	15.0	1.7	.3 m/min ¹	Call Dymax
GA-201	Tack Free After Proper Cure / Moisture and Chemical Resistant / Adhesion to Plastics / UL 157 Certified	Sealing Plastic , Glass, and Metal Surfaces and Enclosures / Sealing Plated Surfaces	Opaque Gel	55,000	A35	165	8	26.0	1.1	.6 m/min ²	Yes



* Compression set is expressed as a percentage of deflection per ASTM D395 Method @ 25% deflection. To determine the percent recovery, subtract 1/4 of the value from 100%.

** Intensity measured over the UVA range (320-395 nm) using a Dymax ACCU-CAL™ 50 radiometer.

¹ At 53 mm [2.1 in] focal distance. Maximum speed of conveyor is 8.2 m/min [27 ft/min]. Intensity was measured over the UVA range (320-395 nm) using the Dymax ACCU-CAL™ 100 Radiometer.

² Minimum intensity 250 mW/cm².

| AUTOMOTIVE | MOBILE DEVICES | LIGHTING |

Click on the product numbers for more information.


Chemical **RESISTANCE** Table

Product Number	% Change After Removal	Unused Motor Oil SAE 10W-30	Used Motor Oil High Mileage SAE 10W-30	Brake Fluid	Transmission Fluid	Diesel Fuel	Power Steering Fluid	Salt Water 5% NaCl	Isopropyl Alcohol 99%	Suntan Lotion SPF 50	Hand Lotion
GA-103	Immediately	27.92	10.7	0.97	15.87	63.16	11.09	-0.76	2.52	-0.03	2.84
	1 week	27.69	10.37	0.62	15.65	56.74	11.06	-1.46	-1.97	-1.02	1.78
GA-105	Immediately	2.35	2.36	37.71	2.96	37.04	3.03	5.78	57.24	10.5	7.85
	1 week	2.5	2.5	37.54	3.07	32.7	3.26	0.2	-18.5	4.43	1.36
GA-108	Immediately	-2.97	-2.24	33.53	-13.91	40.26	0.48	0.35	47.76	3.61	2.37
	1 week	-4.72	-3.93	32.64	-16.02	30.1	-0.35	-6.31	-29.73	-0.75	-2.19
GA-112	Immediately	0.47	1.7	37.14	1.03	20.24	0.04	0.62	21.05	3.44	2.08
	1 week	0.4	1.65	36.63	0.96	15.38	-0.01	-0.43	-3.14	2.03	0.42
GA-120	Immediately	4.75	4.88	27.49	5.95	52.41	3.26	1.28	not recommended	5.97	3.7
	1 week	4.74	4.7	25.85	5.88	46.25	3.13	0.01	not recommended	4.24	1.27
GA-140	Immediately	1.07	1.05	32.61	1.38	19.53	0.52	0.49	45.51	3.97	2.39
	1 week	1	0.98	31	1.5	15.17	0.46	-0.19	-0.81	3.03	1.03
GA-142	Immediately	3.9	4.32	34.86	5	50.03	2.6	1.29	57.91	6.41	3.4
	1 week	3.7	3.97	32.48	5.05	44	2.56	-0.13	-14.4	3.14	1.09
GA-145	Immediately	17.89	15.54	3.81	23.5	72.06	13.95	0.21	13.07	2.18	1.03
	1 week	17.95	15.48	3.33	23.99	66.41	14.19	0.23	1.17	1.89	0.66
GA-201	Immediately	1.41	1.41	32	1.93	19.66	0.63	-0.09	45.63	5.64	2.58
	1 week	1.31	1.47	30.07	1.87	14.61	0.65	-0.79	-2.84	4.35	1.25

Notes:

Sample starting dimensions - 57.25 mm x 10.64 mm x 3.3 mm weighing 2.2 to 2.3 grams each
 The samples were immersed in fluid for 72 hours at room temperature.

- Immediately – Wiped clean and weight measured. Results = % of weight change after immersion.
- 1 Week – Wiped clean, left at room temperature for 1 week, and weight measured. Results = % of weight change after immersion.

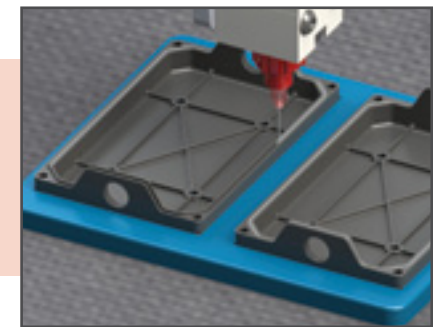

| ELECTRICAL DEVICES | HVAC | ENERGY | INDUSTRIAL HARDWARE |

The IP Rating System

Innovative TECHNOLOGIES

The Ingress Protection (IP) Rating System is an industry standard for testing a finished component based on specific solid and liquid parameters. Ingress protection testing is utilized to establish if a product's exterior case or enclosure will protect the internal working parts or component from solid or liquid ingress. IP ratings are called out in the test standard known as IEC (International Electrotechnical Commission) 60529.

The IP rating is widely used for all types of enclosures including electrical enclosures, electronic enclosures, and protective cases for smart phones. Many customers have to meet this test and identify this as a requirement for the gasket. Dymax gaskets will not be rated but will be part of an end-item which is rated. The gaskets, along with the construction/configuration of the enclosure, can positively influence test results based upon their sealing capabilities. The product selector guide on pages 2-3 and the corresponding product TDS will guide the end-user to the applicable gasket for their application.

The IP Rating table below defines the protection against solid foreign objects with the first digit e.g. IP6_ (protection against dust) and protection against liquids in the second digit e.g. IP_5 (protected against water jets).

Protection Against Solid Objects - 1st Digit Description Definition	Protection Against Liquids - 2nd Digit Description Definition
0 Non-protected. No special protection.	0 Non-protected. No special protection.
1 Protected against solid objects greater than 50 mm. A large surface of the body such as the hand (no protection against deliberate access). Solid objects exceeding 50 mm diameter.	1 Protected against dripping water. Dripping water (vertically falling drops).
2 Protected against solid objects greater than 12 mm. Fingers or other objects not exceeding 80 mm in length. Solid objects exceeding 12 mm diameter.	2 Protected against dripping water when tilted up to 15°. Vertically dripping water shall have no harmful effect.
3 Protected against solid objects greater than 2.5 mm. Tools, wires, etc., of diameter or thickness greater than 2.5 mm. Solid objects exceeding 2.5 mm diameter.	3 Protected against spraying water. Water falling as spray at an angle up to 60° from the vertical shall have no harmful effect.
4 Protected against solid objects greater than 1.0 mm. Wires or strips of thickness greater than 1.0 mm. Solid objects exceeding 1.0 mm.	4 Protected against splashing water. Water splashed against the enclosure from any direction shall have no harmful effect when the enclosure is tilted at any angle up to 15° from its normal position.
5 Protected against dust. Ingress of dust is not totally prevented but dust does not enter in sufficient quantity to interfere with satisfactory operation of the equipment.	5 Protected against water jets. Water projected from a nozzle against the enclosure from any direction shall have no harmful effect.
6 Dust-tight. No ingress of dust.	6 Protected against heavy seas. Water from heavy seas or water projected in powerful jets shall not enter the enclosure in harmful quantities.
	7 Protected against the effects of immersion. Ingress of water in a harmful quantity shall not be possible when the enclosure is immersed in water under defined conditions of pressure and time.
	8 Protected against submersion. The equipment is suitable for continuous submersion in water under conditions, which shall be specified by the manufacturer.

The test means and main test conditions for the tests for protection against water (2nd number) are defined as follows:

Test means – A water jet hose nozzle with a nozzle diameter of 6.3 mm is positioned 2.5 m to 3 m from the enclosure being tested

Water flow rate – 12.5 l/min ±5%

Duration of test – 1 min/m² but at least 3 min.

Test conditions – Test will be performed spraying the enclosure from every practicable angle

Dual-Cure Light/Moisture-Cure Technology

Dual-cure coatings are formulated to ensure complete cure in applications where shadowed areas on high-density circuit boards are a concern. Areas shadowed from light are typically managed by selective coating or a secondary heat-cure process. Instead, Dual-cure coatings ensure shadowed areas cure over time with moisture, eliminating the need for a second process step and concerns of component life degradation due to temperature exposure.




LED Light-Curable Adhesives

Dymax offers specially formulated LED light-curable adhesives that are optimized to work seamlessly with Dymax LED light-curing systems. The adhesives range from fast to ultra-fast cure speeds in order to accommodate specific assembly needs. LED light-curing equipment is available in a number of different styles including spot lamps, flood lamps, and conveyors to accommodate various process requirements.

See-Cure Technology

Dymax light-curable adhesives with patented See-Cure color-change technology have built-in cure validation that makes it easy for operators or simple automated inspection equipment to confirm cure without investing in additional specialized equipment. See-Cure technology is an indicator of cure that intentionally transitions the color of the adhesive after it has cured and builds a visible safety factor into the assembly process.

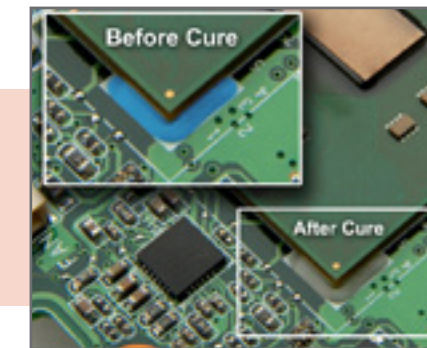


Encompass™ Technology

Dymax adhesives formulated with Encompass™ technology incorporate Dymax exclusive Ultra-Red® fluorescing and See-Cure color-change technologies into one light-curable product. As a result, manufacturers gain efficiencies from rapid on-demand curing with easy cure confirmation and post-cure bond-line inspection.

Ultra-Red® Fluorescing Technology




Ultra-Red® fluorescing technology enhances bond-line inspection processes and product authentication. Adhesives formulated with Ultra-Red® remain clear until exposed to low-intensity UV light at which point they fluoresce bright red. This is particularly effective while bonding plastics that naturally fluoresce blue, such as PVC and PET. Ultra-Red® technology also produces a unique spectral signature that can be used by manufacturers for product authentication.

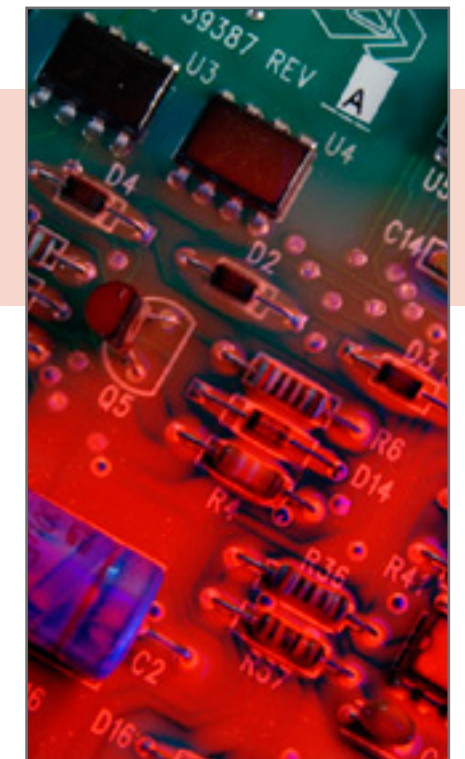

Dispensing & Curing EQUIPMENT

Dymax designs, manufactures, and sells a range of light-curing spot lamps, flood lamps, conveyor systems, and dispensing equipment, as well as radiometers and other equipment accessories. These systems work with Dymax light-curable adhesives and provide process efficiencies by targeting rapid surface curing, depth of cure, and speed of cure, all while delivering light in a quick and economical way. Dymax equipment is ideal for industrial bonding, coating, encapsulating, potting, and sealing applications. Manufacturers can easily integrate these curing systems into existing assembly lines or use them as stand-alone, bench-top curing systems. CE marked equipment is available.

CURING

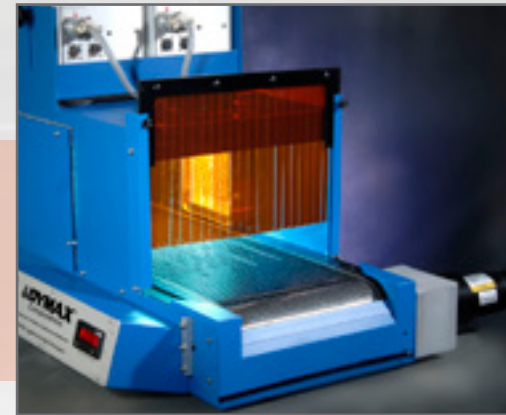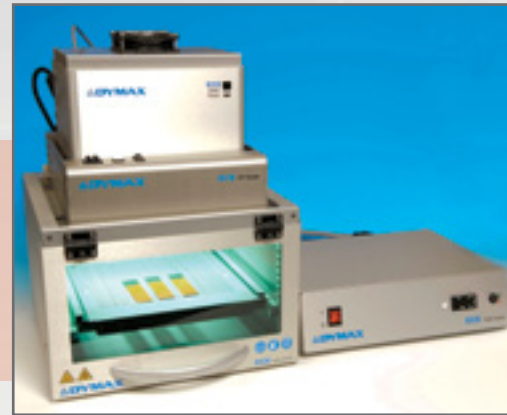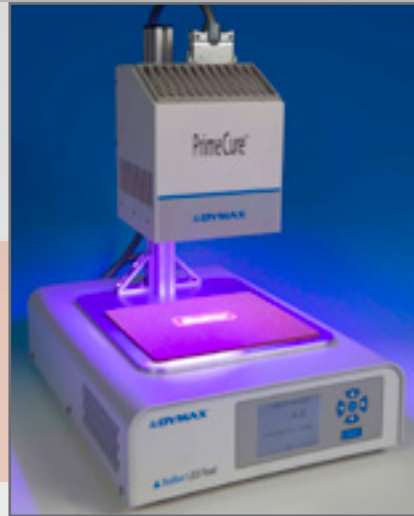

DISPENSING



UV-Curing Spot Lamps

[Spot-curing systems](#) emit very high-intensity UV/Visible light and are ideal for quickly curing small areas (5 mm diameter) – typically within a 0.5-5 second cure time. They use high-pressure mercury vapor bulbs that produce light energy in the 300 to 450 nm range and can be equipped with single- or multi-pole lightguides or rod lenses for a variety of curing options.

Light-Emitting Diode (LED) Curing Equipment – Spot and Flood Lamps

LED spot and flood lamps generate UV and visible curing light using an array of surface-mounted LEDs instead of traditional metal halide or mercury bulbs. [These lamps](#) emit over 15,000 mW/cm² of UV light (centered at 385 nm) and offer cooler cures compared to traditional bulb-style lamp systems. They emit light over a narrow spectrum at a discreet wavelength and extend maintenance intervals due to the longevity of the LED array. There are no bulbs to change and no warm-up; just cool cures and constant intensity for thousands of hours.

UV-Curing Flood Lamps

UV light-curing flood-lamp systems are ideal for area curing of large parts or simultaneously curing many small parts. They use moderate- to high-intensity multi-spectrum UV/Visible light for curing areas larger than 12.7 mm in diameter. With intensities ranging from 75-225 mW/cm², [Dymax flood lamps](#) are capable of curing most UV light-curable adhesives, sealants, and coatings, tack free in 30 seconds or less.

UV-Curing Conveyors

Conveyor systems consist of a moving belt that passes through a curing tunnel with multi-spectrum lamps mounted above or on each side for fast curing of parts. These [conveyor systems](#) are designed to offer consistent, fast, and safe curing. They can be outfitted with standard metal halide (longwave UV), mercury (shortwave UV), or visible bulbs. Consistent line speed, lamp height, and intensity provide a consistent light-curing process for high throughput.

Radiometers

A radiometer is a device that measures the intensity and/or dose associated with light of specified wavelengths. UV light is, by definition, not visible and so a radiometer is required to determine UV intensity. [Dymax radiometers](#) measure intensity and dose of UV spot lamps, flood lamps, and conveyors in the UVA (320-395 nm) range. Measuring light intensity and/or dose is useful for maintaining a controlled, “worker friendly” light-curing process and measuring the transmission of light through the substrate.

Accessories

A variety of [accessories](#) is available for use with Dymax light-curing equipment including single- and multi-pole light-guides for spot-curing lamps, as well as shields, stands, and shutters for mounting or modifying flood-curing lamps.

Dispensing Systems

Dymax has developed high-quality, field-proven [dispense systems](#) to fit many types of adhesive and fluid dispensing applications. These systems include various automated and manual dispensing valves, spray valves and guns, and related components for seamless integration into assembly processes. The systems provide accurate, consistent dispense for a range of low- to high-viscosity fluids. [Dispensing systems](#) with adjustable suck-back control to facilitate clean, crisp shutoff and dispensing valves that offer contaminate-free dispensing are available. Dymax partners with some of the world’s leading dispensing manufacturers to provide solutions for applications that require high-speed automated dispensing equipment.

SPOT LAMPS | FLOOD LAMPS | CONVEYOR SYSTEMS | DISPENSERS | RADIOMETERS | ACCESSORIES

Dymax Corporation

860.482.1010
info@dymax.com
www.dymax.com

**Dymax Ireland Engineering
Adhesives Ireland Ltd.**

+353.21.237.3016
info_ie@dymax.com
www.dymax.ie

Dymax Europe GmbH

+49 (0) 611.962.7900
info_de@dymax.com
www.dymax.de

**Dymax UV Adhesives &
Equipment (Shenzhen) Co Ltd**

+86.755.83485759
dymaxasia@dymax.com
www.dymax.com.cn

**Dymax UV Adhesives &
Equipment (Shanghai) Co Ltd**

+86.21.37285759
dymaxasia@dymax.com
www.dymax.com.cn

Dymax Asia (H.K.) Limited

+852.2460.7038
dymaxasia@dymax.com
www.dymax.com.cn

Dymax Korea LLC

+82.2.784.3434
info_kr@dymax.com
www.dymax.com/kr

Dymax Oligomers & Coatings

860.626.7006
oligomers&coatings@dymax.com
www.dymax-oc.com

Dymax Asia Pacific Pte. Ltd.

+65.6752.2887
info_ap@dymax.com
www.dymax-ap.com

©2017 Dymax Corporation. All rights reserved. All trademarks

in this guide, except where noted, are the property of, or used under license by, Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax does not warrant

the data contained in this bulletin. Any warranty applicable to the product, its application, and use is strictly limited to that

contained in Dymax's standard Conditions of Sale. Dymax

does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine

the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing

apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably

advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation

that the product use or application will not infringe a patent

owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax

recommends that each user adequately test its proposed use and application before actual repetitive use, using

the data contained in this bulletin as a general guide.