

# Using the Dymax Pail-Opening Tool to Remove Adhesive Pail Covers

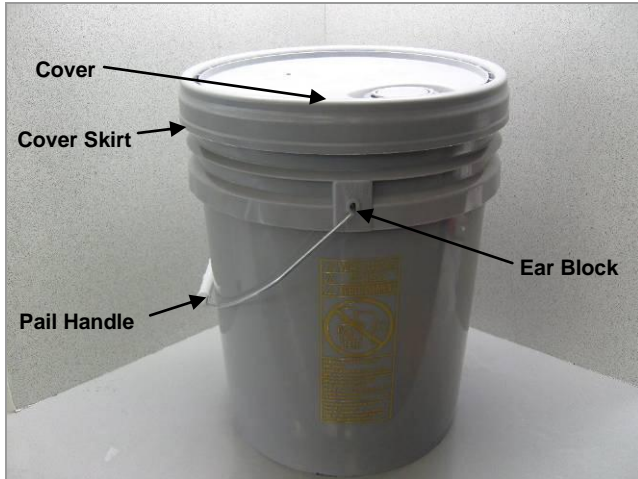


Figure 1. Pail Components

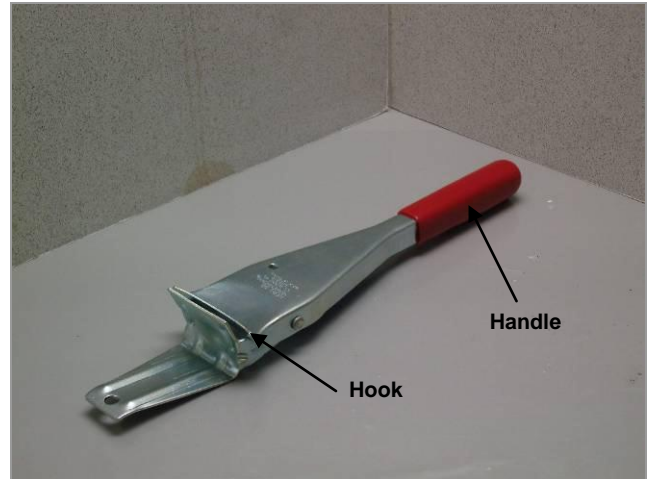


Figure 2. Pail Tool (T17170)

1. Place the Hook of the Pail Tool (T17170) on the underside of the Cover Skirt and **JUST** to the right of the Ear Block (Figure 3).

Note: It is critical to start close to the Ear Block.

2. Quickly push downward on the Handle of the Pail Tool until a distinct click sound is heard. Relieve the pressure and reposition the tool approximately 2 inches [5 cm] away from the starting position.



Figure 3. Place the Pail Tool Hook under the Cover Skirt and Push Downward on the Pail Tool Handle



Figure 4. Repeat Steps 1 & 2 Around the Entire Circumference of the Pail

3. Repeat Steps 1 and 2 every 2 inches [5 cm] around the entire circumference of the Pail. Skip the positions directly below the Ear Block.
4. Lift the Cover upward to remove. If portions of the Cover are still latched, repeat Steps 1 and 2 until all portions of the Cover are unlatched.



Figure 5. Open Pail



© 2012 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

The data contained in this bulletin is of a general nature and is based on laboratory test conditions. Dymax does not warrant the data contained in this bulletin. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax does not assume responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax or act as a grant of license under any Dymax Corporation Patent. Dymax recommends that each user adequately test its proposed use and application before actual repetitive use, using the data contained in this bulletin as a general guide.

TB081DA 12/18/2012

**Dymax Corporation**  
860.482.1010  
info@dymax.com  
[www.dymax.com](http://www.dymax.com)

**Dymax Oligomers & Coatings**  
860.626.7006  
oligomers&coatings@dymax.com  
[www.dymax-oc.com](http://www.dymax-oc.com)

**Dymax Europe GmbH**  
+49 (0) 611.962.7900  
info\_de@dymax.com  
[www.dymax.de](http://www.dymax.de)

**Dymax UV Adhesives & Equipment (Shenzhen) Co Ltd**  
+86.755.83485759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

**Dymax UV Adhesives & Equipment (Shanghai) Co Ltd**  
+86.21.37285759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

**Dymax Asia (H.K.) Limited**  
+852.2460.7038  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

**Dymax Korea LLC**  
82.2.784.3434  
info@dymax.kr  
[www.dymax.co.kr](http://www.dymax.co.kr)