

SG-150 Hand-Held Spray Guns

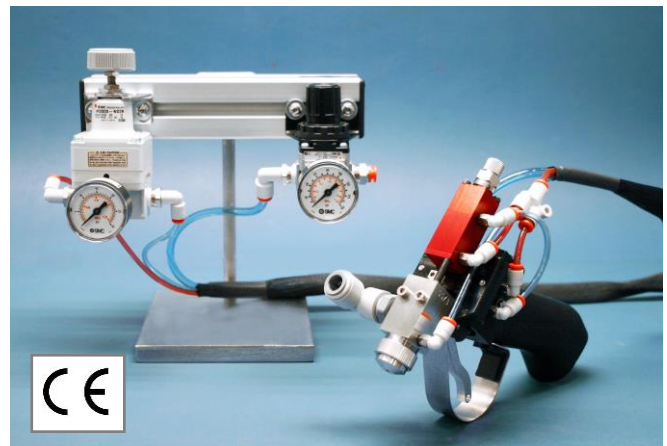
Dymax SG-150 hand-held spray guns, available in both standard and high flow models, provide a solution to manually spray fluids for masking and coating applications. The SG-150-RS standard-flow spray gun is ideal for dispensing fluids with viscosity lower than 10,000 cP, while the SG-150-RH is better suited for spraying fluids with viscosity of 10,000 cP and higher.

Both SG-150 models utilize a front-closing, stainless steel needle valve to control fluid flow and have a dual-acting air cylinder that provides immediate start/stop functionality. A stroke adjustment on the valve can be used to fine tune the flow rate and a precision air regulator/gauge assembly simultaneously activates the atomizing air while the valve is opened and fluid is flowing. Both models are delivered with a round spray cap that provides a circular spray pattern, with an optional flat spray cap available if a linear or flat spray pattern is preferred.

The guns' design incorporates a durable, light-weight, cast metal handle with pneumatic trigger mechanism so no additional electronic controls are required to activate the spray. The operator effortlessly controls the spray by manually pulling or releasing the trigger.





Dymax spray valves provide users with manual control over the valve and its spray and are ideal for the following applications:

- Masking of turbines or other metal surfaces before surface treatment
- Masking medical implants before finishing treatments
- Conformal coating of circuit boards
- Spraying solvents for cleaning part surfaces
- Coating large parts with grease or other lubrication before assembly



Spray Gun with Round Spray Cap for Manual Spraying

Features	Benefits
All wetted components are stainless steel, Teflon®, or Kalrez®	<ul style="list-style-type: none"> ■ Compatible with a greater number of fluids
Able to dispense from pressurized cartridges, bottles, and pails (requires appropriate reservoir hardware)	<ul style="list-style-type: none"> ■ Compatible with most standard fluid packages and delivery systems (Dymax can supply all the necessary parts and components to build a complete spray system.)
Lightweight assembly with low trigger resistance	<ul style="list-style-type: none"> ■ Ergonomic design allows for hours of effortless spraying
Easy adjustment of material flow and spray atomization	<ul style="list-style-type: none"> ■ Greater dispensing accuracy with less material waste
Pneumatically operated	<ul style="list-style-type: none"> ■ No electrical power required
Sealed fluid body with no exposure to ambient conditions	<ul style="list-style-type: none"> ■ Easy shutdown and cleanup

SPECIFICATIONS			
Part Numbers	T18435 SG-150-RS Standard-flow Spray Gun, Round Spray Cap (use with viscosities <10,000 cP)		
	T18449 SG-150-RH High-flow Spray Gun, Round Spray Cap (use with viscosities >10,000 cP)		
Activation	Manually Controlled – Trigger Actuated		
Electrical Power Requirements	None		
Air Pressure Required	Valve Operation 60 psi [4.14 bar] to 100 psi [6.89 bar]		
	Atomizing Air 0 psi [0 bar] to 15 psi [1.03 bar] (Standard-flow Spray Gun) 0 psi [0 bar] to 30 psi [2.06 bar] (High-flow Spray Gun)		
Spray Pattern	Round Air Cap (standard) 0.25" – 1.0" [6.35 mm – 25.40 mm]		
	Flat Air Cap (optional accessory) 0.50" – 2.0" [12.70 mm – 50.80 mm]		
Flow Rate	Standard flow 0.3 mL/sec (spraying 25,000 cP thixotropic fluid)		
	High flow 2.0 mL/sec (spraying 25,000 cP thixotropic fluid)		
Fluid Input Fitting	3/8 tube push in Accepts 3/8" OD tubing		
Dimensions (L x W x H)	Spray Gun Assembly 8" x 4" x 8" (20.5 cm x 10.2 cm x 20.5 cm)		
	Air Regulator Stand 8" x 9" x 9" (20.5 cm x 22.8 cm x 22.8 cm)		
Weight	Spray Gun Assembly 1.7 lb (0.8 kg)		
	Air Regulator Stand 6.6 lb (3.0 kg)		
Unit Warranty	1 year from purchase (excludes soft seals)		
Options and Accessories	 T15697 Flat Spray Air Cap	 T15454 Front Closing Stand with Drip Cup	 T16307 Air Filter Regulator with Air Shut Off
	 T15454 High-Precision Air Regulator for fluid pressure	 T16787 Fluid Line Kit - 3/8" OD, Polyethylene	 T16793 Fluid Line Kit - 1/4" OD, Polyethylene



© 2016 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A. Teflon and Kalrez are registered trademarks of DuPont Corporation.

Please note that most dispensing system applications are unique. Dymax Europe GmbH does not warrant the fitness of the product for the intended application. Any warranty applicable to products, its application and use is strictly limited to that contained in Dymax Europe GmbH's General Terms and Conditions of Sale published on our homepage www.dymax.com/de/pdf/dymax_europe_general_terms_and_conditions_of_sale.pdf. Dymax Europe GmbH does not assume any responsibility for test or performance results obtained by users. It is the user's responsibility to determine the suitability for the product application and purposes and the suitability for use in the user's intended manufacturing apparatus and methods. The user should adopt such precautions and use guidelines as may be reasonably advisable or necessary for the protection of property and persons. Nothing in this bulletin shall act as a representation that the product use or application will not infringe a patent owned by someone other than Dymax Corporation or act as a grant of license under any Dymax Corporation Patent. Dymax Europe GmbH recommends that each user adequately test its proposed use and application of the products before actual repetitive use, using the data contained in this bulletin as a general guide.

PB004EU 10/7/2016

Dymax Corporation
+1.860.482.1010 | info@dymax.com | www.dymax.com

Dymax Europe GmbH
+49 (0) 611.962.7900 | info_de@dymax.com | www.dymax.de

Dymax Engineering Adhesives Ireland Ltd.
+353 21.237.3016 | info_ie@dymax.com | www.dymax.ie

Dymax Oligomers & Coatings
+1.860.626.7006 | info_oc@dymax.com | www.dymax-oc.com

Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd.
+86.21.37285759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd.
+86.755.83485759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia Pacific Pte. Ltd.
+65.6752.2887 | info_ap@dymax.com | www.dymax-ap.com

Dymax Korea LLC
+82.2.784.3434 | info_kr@dymax.com | www.dymax.com/kr